



**The Ultimate Fresh & Salt Water Analyzer  
for Aquariums and Aquaculture applications**



**Up to 8 Tests in 2 Minutes!**  
**Ready to go anywhere!**







Every now and then a technology emerges that changes people's lives. For people who test water, that time is now.


Available Tests:

- Alkalinity
- Ammonia
- Calcium
- Hardness
- Magnesium
- Nitrate
- Nitrite
- pH
- Phosphate

Up to 8 Tests in 2 Minutes!

- Reliable Results
- Super Fast & Simple
- Auto-Record Keeping
- Rugged and Portable

The innovative WaterLink® Spin Touch® FX photometer does all your freshwater, saltwater and brackish water testing for you. Each sealed reagent SpinDisk® contains the precise amount of reagent needed to run a complete series of tests for each of these water types. Just fill one unique SpinDisk® with less than 3 mL of water and all your vital tests are done automatically—in just 2 minutes! It's the most advanced system for wet chemistry methods ever produced. Now analysts can achieve test results without time consuming test and clean-up procedures. This ground-breaking analysis system is so simple anyone can use it! No vials to fill, no prep time, no guessing!


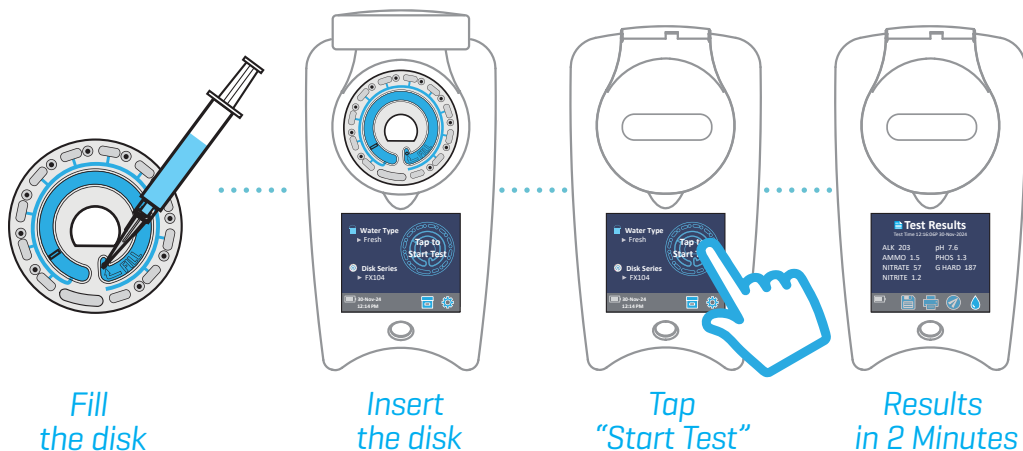


So Simple! So Fast!

"The Spin Touch FX is quick and easy to use. The readings I have received are accurate and compare to my conventional tests."  
- Kenny, First Feed Supervisor



# The Device *Analysis of up to 8 parameters in 2 minutes!*

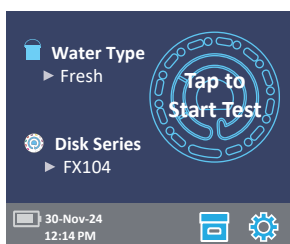

## Reliable Results

- Virtually Eliminates User-Error
- Pre-Measured Reagents
- Exact Reaction Time and Auto-Blanking
- Meter Calibration Check System
- 6-Wavelength Photometer

## Super Fast & Simple

- 2 Minutes for up to 8 Complete Tests Using One Disk
- Fill Disk and Insert > Tap "Start Test" > Read Results

## Data Logging

- Stores Test Dates, Times, Results, and Location
- Download via USB to PC

## Stand-Alone or Cloud-Connected

- Touchscreen Operation
- Connect to WaterLink Solutions via Bluetooth®

## Rugged and Portable

- Innovative Water-Resistant Housing
- Internal, Rechargeable Batteries

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

Instrument Type:	Photometer
6 Wavelengths:	390 nm, 428 nm, 470 nm, 525 nm, 568 nm, 635 nm
Display:	Color Capacitive Touchscreen, 3.5", 320 X 240 pixel resolution
Languages	English, French, Spanish, German, Italian, Portuguese, Dutch, Swedish, Turkish, Chinese
Batteries:	Lithium Ion, Rechargeable (Full Charge in 10-12 hours), 150 tests per charge
Communication:	Bluetooth, USB-C
Calibration:	Factory Set, Field Calibration via Internet Connection
Data Storage:	Last 250 Test Results with Date, Time, Location
Water Resistance:	Rubber Co-molded Base, Rubber USB Port Plug, Gasketed Display & Hinge
Size & Weight:	8.5 L x 4.9 W x 4.1 H inches; 1.74 lb; 22.6 L x 12.7 W x 11.4 H cm; 0.79 kg
Operation:	Single On/Off/Reset Button with Indicator Light, Touchscreen
Firmware:	Internet updateable (New Test, New Test Calibrations, etc.), requires USB connection to Windows® PC
Printer:	Optional Bluetooth® Printer (Code 5-0067); 384 dots per line at 8 dots/mm resolution
Certification	CE

# The Complete Lab

## WaterLink® Spin Touch® FX Order Code 3589

Includes: Photometer, Instruction Manual, Quick-Start Instructions, 3 Syringes, Meter Check Disk, Disk Cover, Sample Bottle, USB Cable with AC Adapter, Carrying Case (SpinDisk® sold separately)





Spin Touch® FX SpinDisks are available for sale in North America only.

Disks come individually packaged in foil pouches in boxed packs of 50.



Freshwater FX104 [Code 4353-H] | 50/box

Test Factor	Display Abbreviation	Range	Accuracy	Method Detection Limit
Alkalinity	ALK	0 - 250 ppm/14.0 dKH	± 15%	15 ppm/0.8 dKH
Ammonia	AMMO	0 - 3.0 ppm	< 2.0 ppm: ± 0.2 ppm > 2.0 ppm: ± 0.4 ppm	0.2 ppm
Hardness	G HARD	0 - 500 ppm/ 28.0 dGH	± 15%	20 ppm/1.1 dGH
Nitrate	NITRATE	0 - 300 ppm	± 30% up to 125 ppm	5 ppm
Nitrite	NITRITE	0 - 2.0 ppm	± 0.2 ppm	0.1 ppm
pH	pH	4.5 - 10.0	± 0.2	NA
Phosphate	PHOS	0 - 2.0 ppm	± 0.2 ppm	0.2 ppm

Saltwater FX203 [Code 4354-H] | 50/box

Test Factor	Display Abbreviation	Range	Accuracy	Method Detection Limit
Alkalinity	ALK	0 - 300 ppm/17.0 dKH	± 15%	15 ppm/0.8 dKH
Ammonia	AMMO	0 - 3.0 ppm	< 1.0 ppm: ± 0.2 ppm > 1.0 ppm: ± 0.4 ppm	0.2 ppm
Calcium	Ca	200 - 800 ppm	± 15%	NA
Magnesium*	Mg	500 - 2200 ppm	± 15%	NA
Nitrate	NITRATE	0 - 60 ppm	± 25%	5 ppm
Nitrite	NITRITE	0 - 2.0 ppm	± 0.2 ppm	0.1 ppm
pH	pH	6.5 - 10.0	± 0.2	NA
Phosphate	PHOS	0 - 2.0 ppm	± 0.2 ppm	0.2 ppm

Brackish Tablet Package [Code 3865-PKG]

For testing brackish water samples use the Brackish Tablet Package with the Saltwater FX203 SpinDisk®.

\*Brackish samples will not report Magnesium

Disk Patent No. 8,734,734; FCI Patent No. 8,987,000; TCI Patent No. 8,993,337; FCI EU Patent No. EP2784503 A1

# The Optional Software



- Cloud-based and **Free**
- Instantly capture date, time, and test results for each pond or tank
- View in real time water quality test results of each pond or tank
- Monitoring Dashboard\* provides alerts and complete water quality history of each pond or tank
- Download free iOS or Android WaterLink® Solutions PRO App for your mobile device
- Sign up for your WaterLink Solutions account at [softwarecenter.lamotte.com](http://softwarecenter.lamotte.com)

\*Monitoring Dashboard at nominal monthly charge



802 Washington Ave | Chestertown, Maryland 21620 USA  
Tel: 800-344-3100 or 410-778-3100 | Email: [info@lamotte.com](mailto:info@lamotte.com)  
[WaterLinkSpinTouch.com](http://WaterLinkSpinTouch.com) | [LaMotte.com](http://LaMotte.com)